

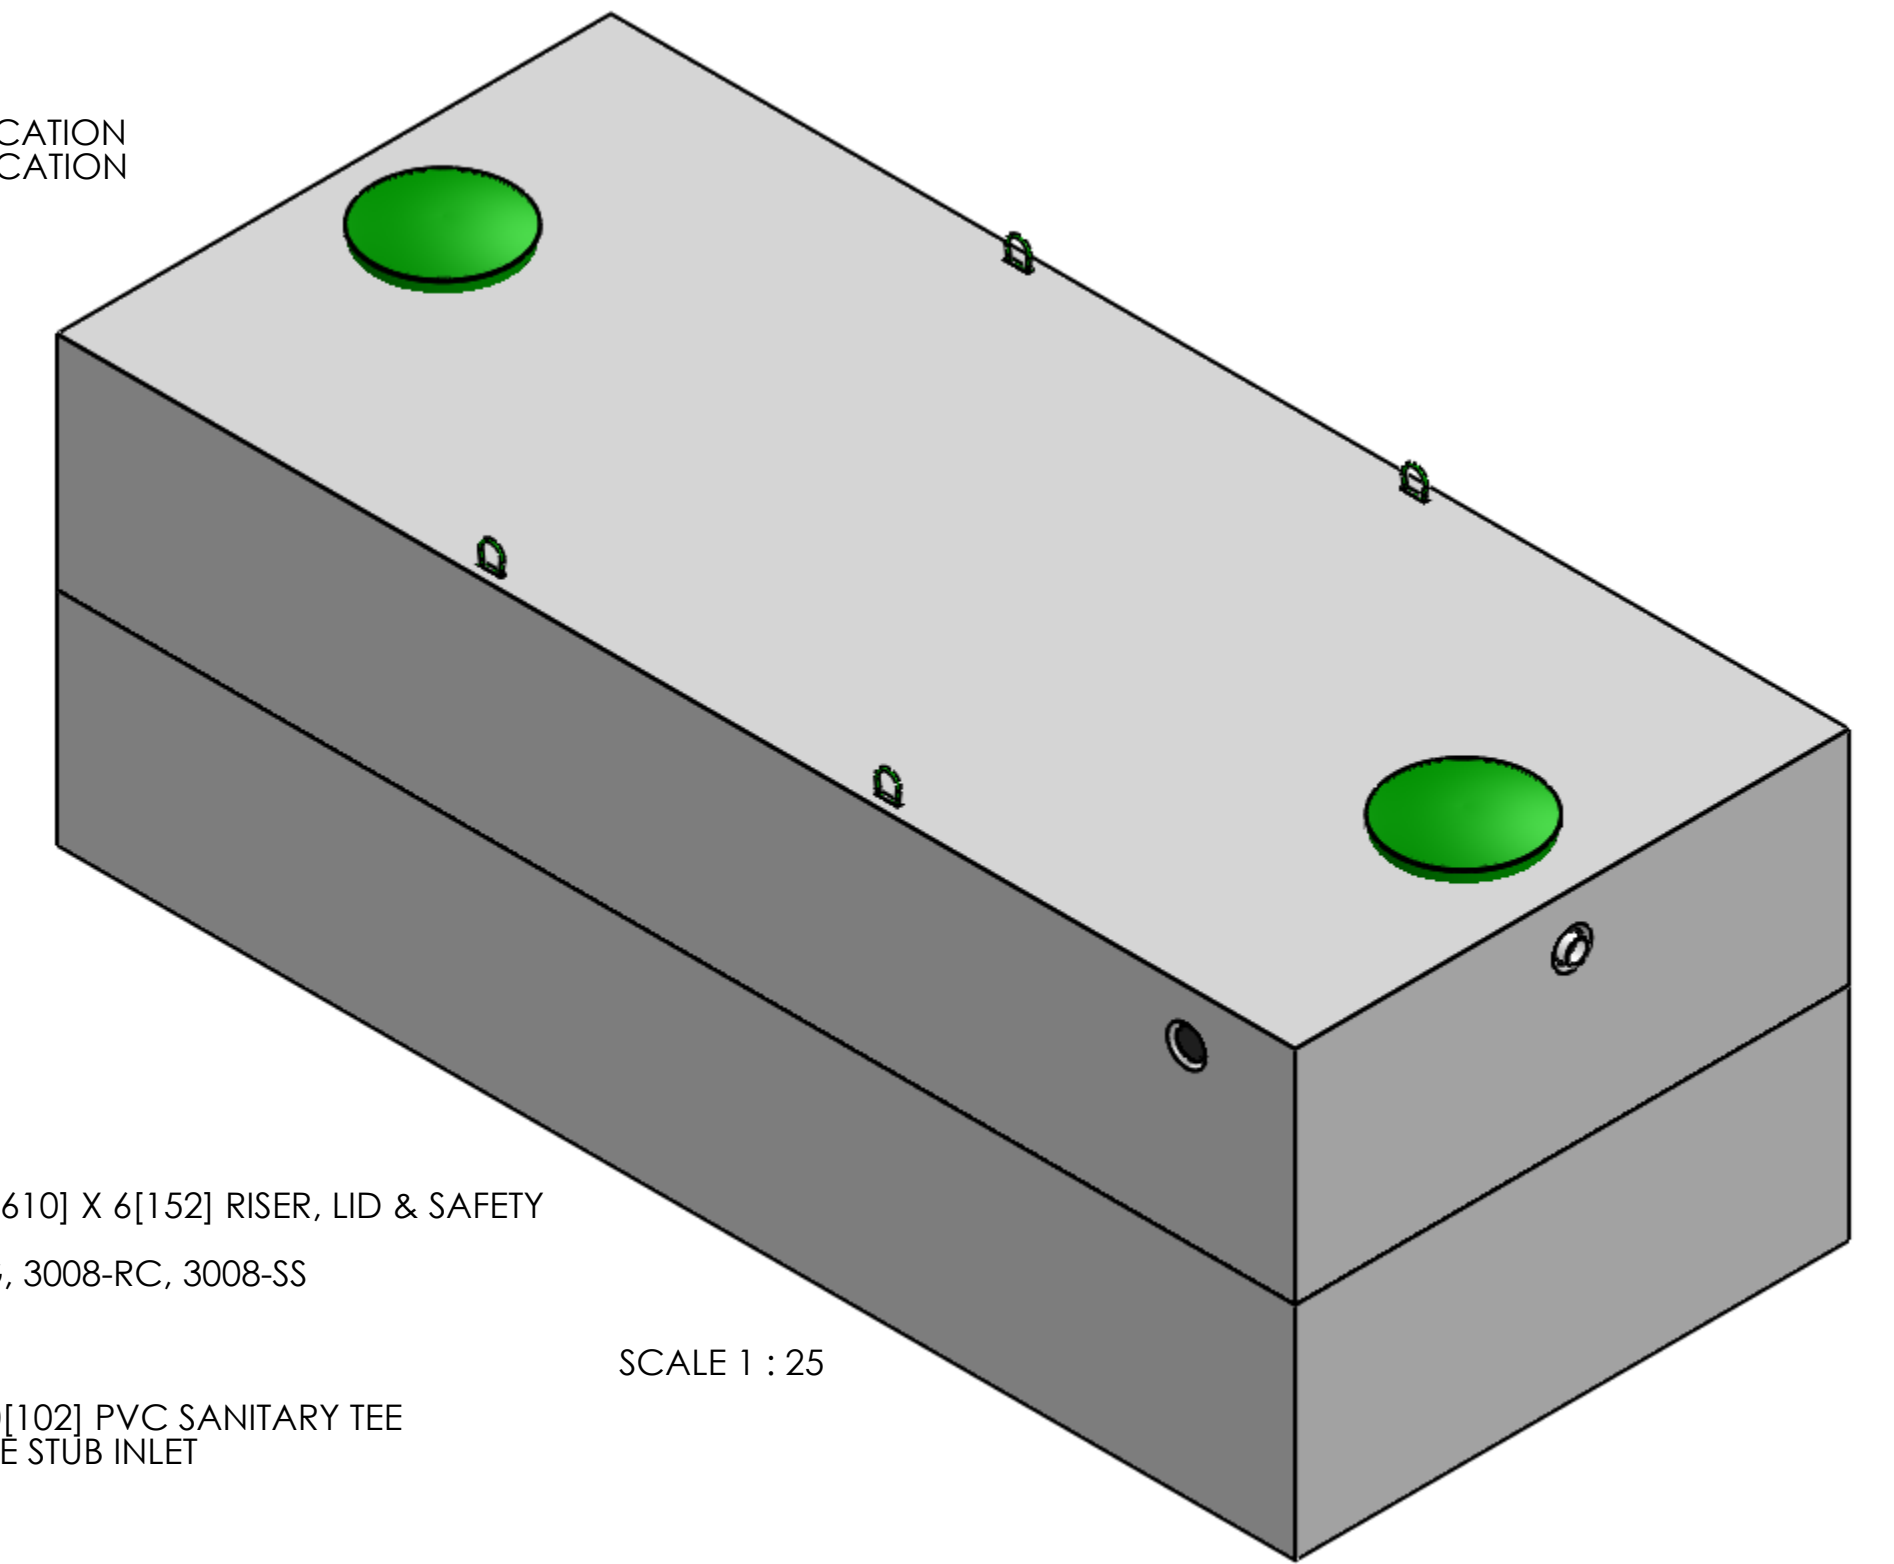
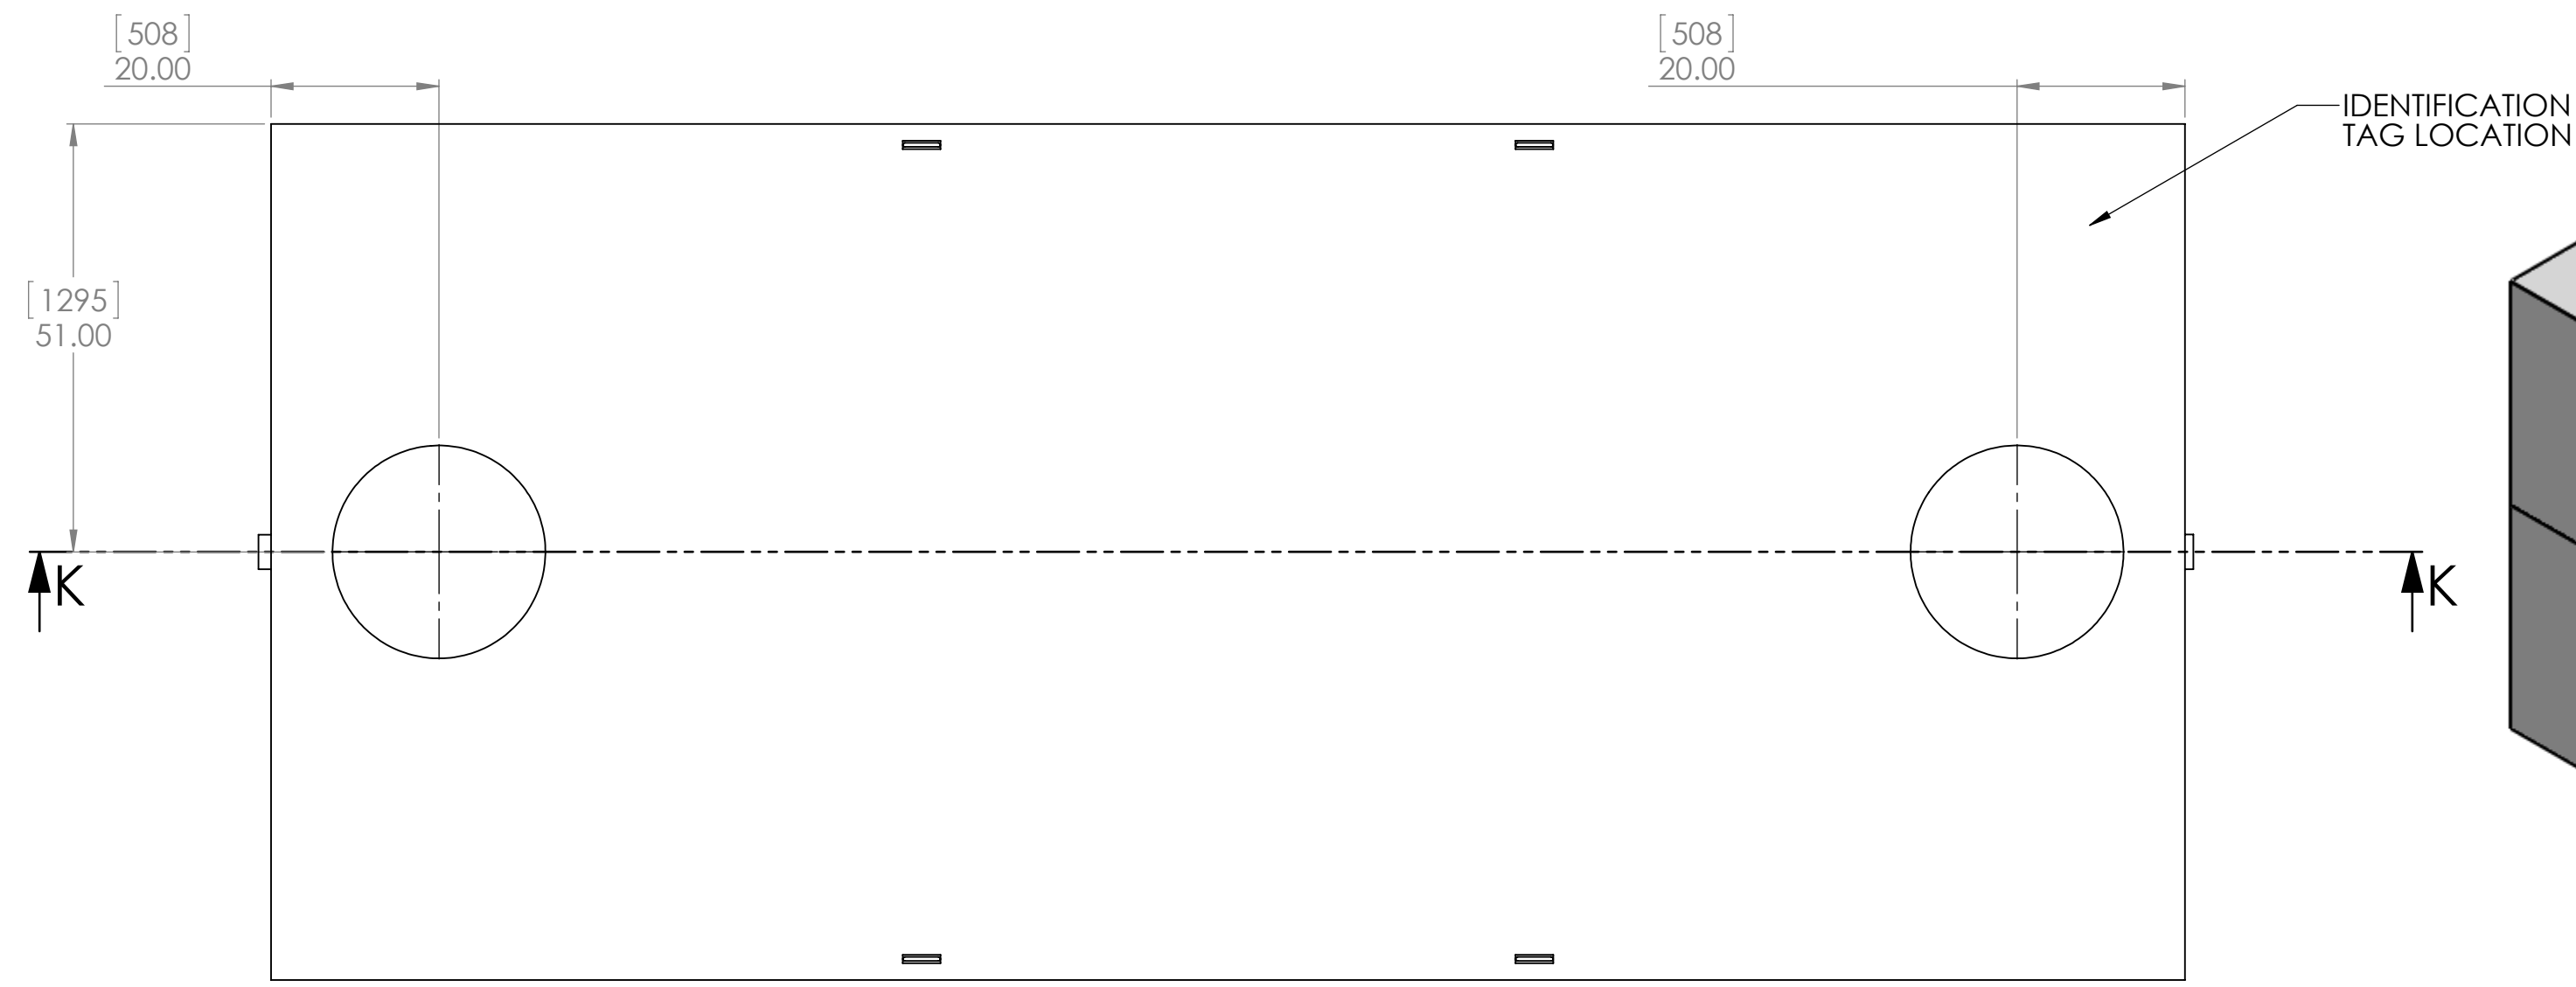
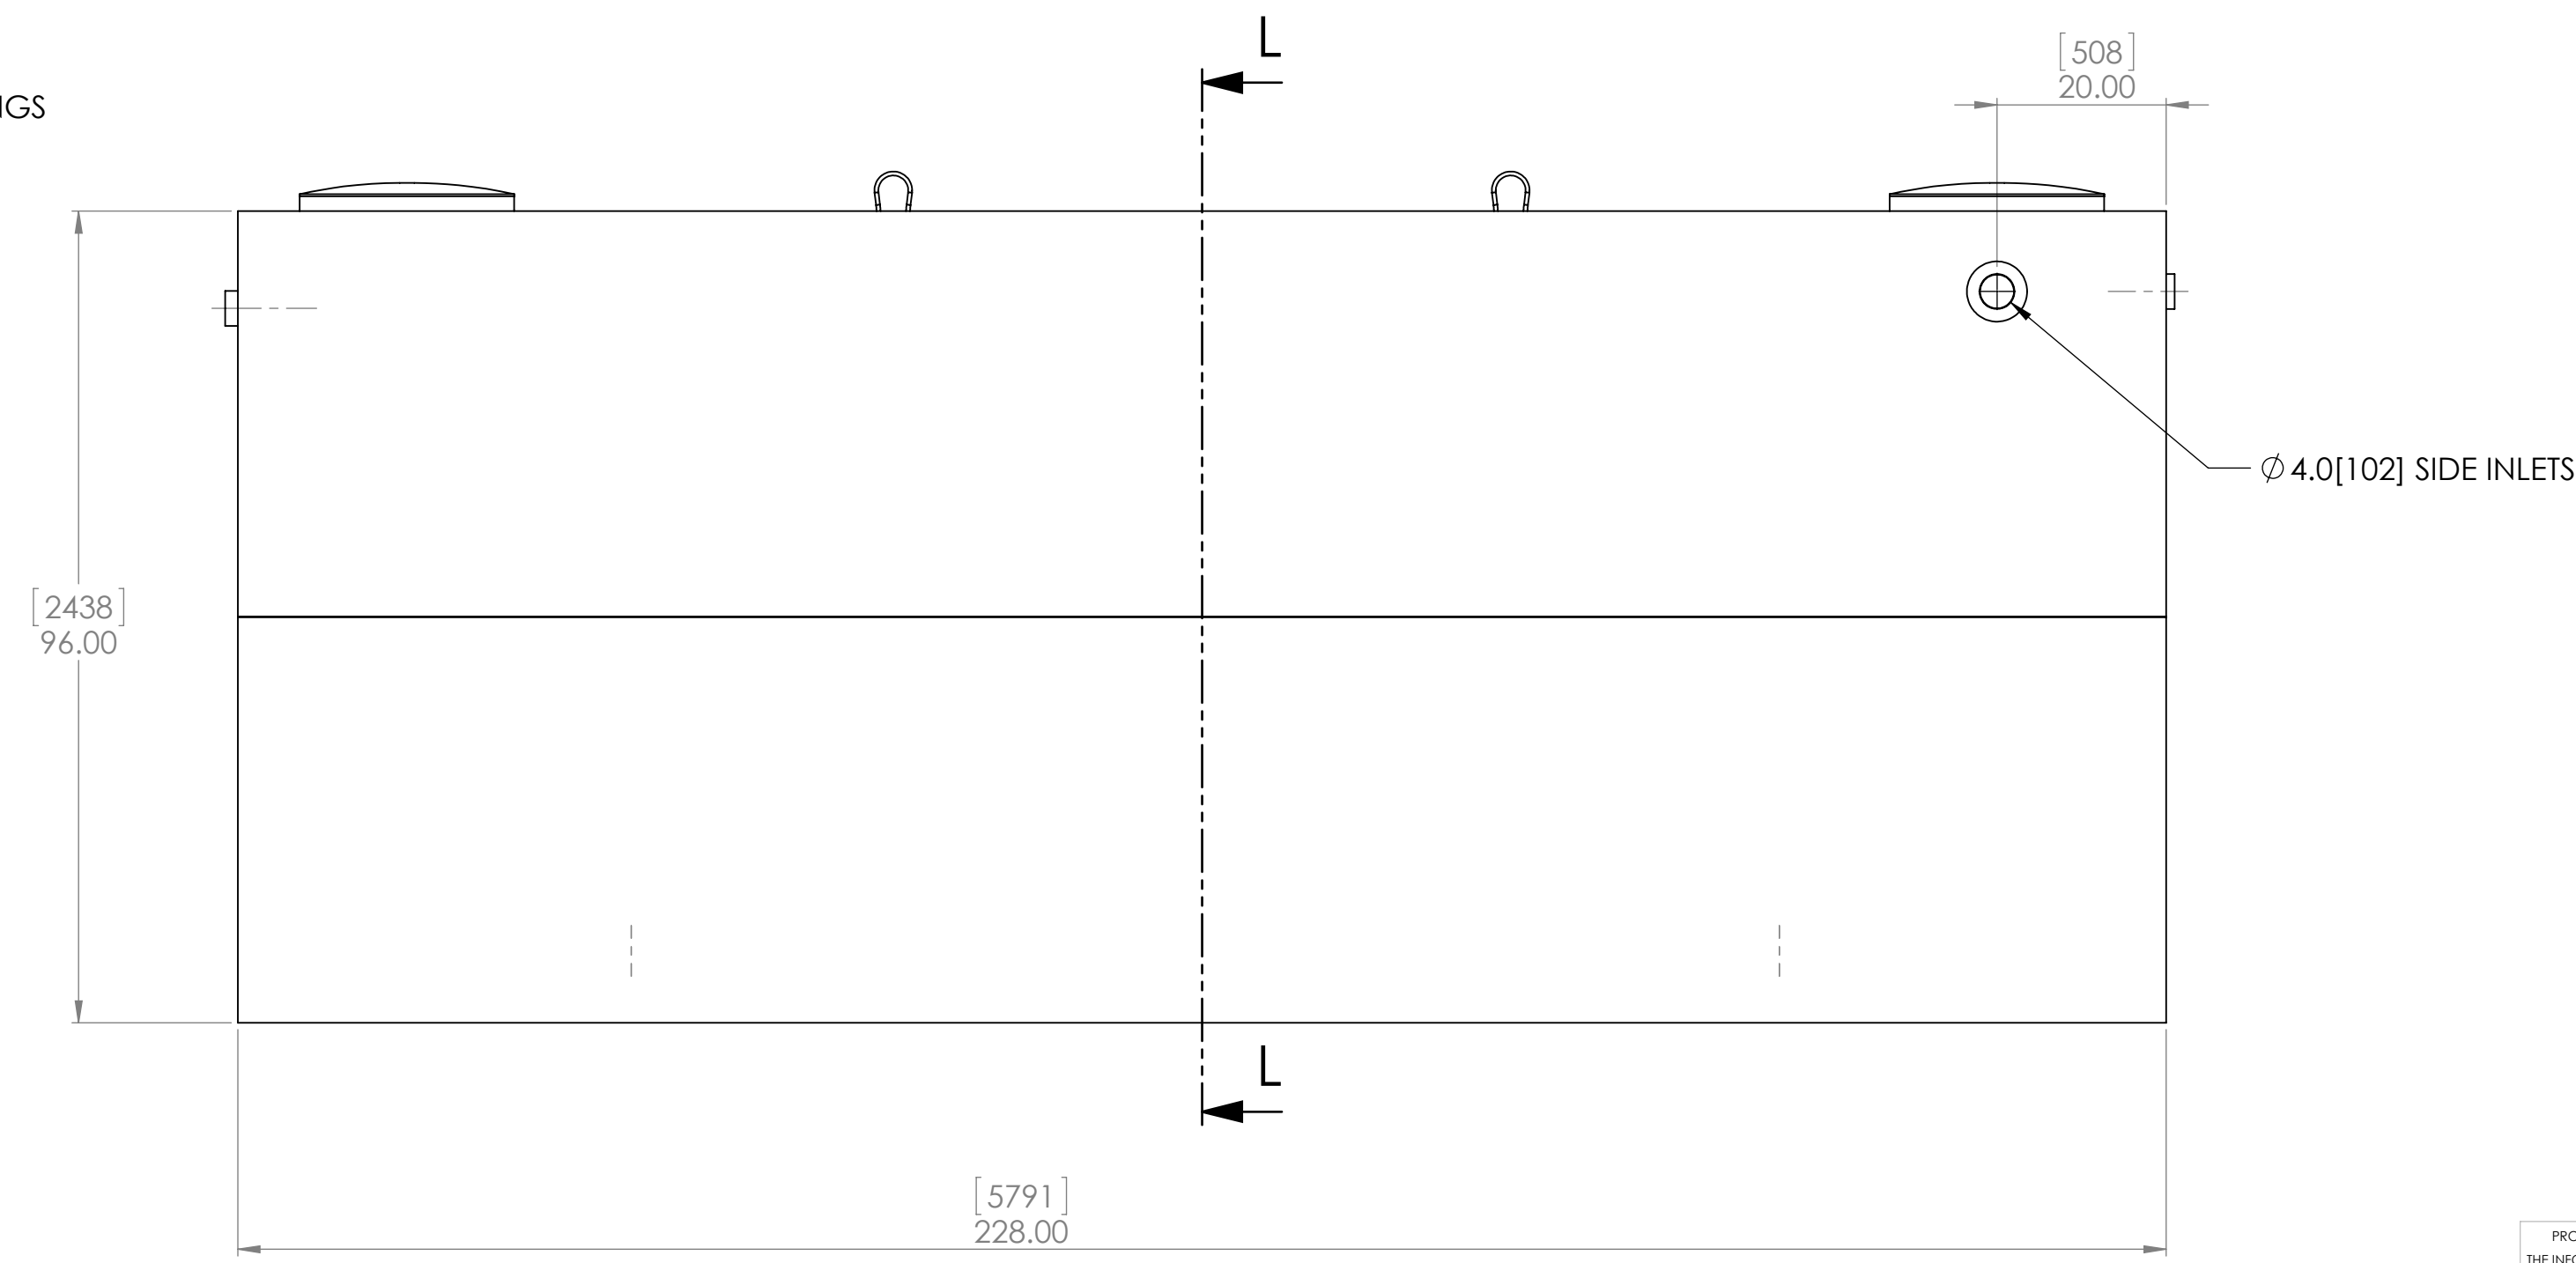


NOTE:
 MATERIAL: CONCRETE 35MPa @ 28DAYS, NON-SULFATE
 CONSTRUCTION: MEETS CSA B66-21
 TOTAL WEIGHT: 19040 kg (41973 lbs)
 TOTAL VOLUME: 22531 L (4956 Imp. Gal.)
 CHAMBER DIVIDER: MONOLITHIC CAST
 WORKING VOLUME: 20021 L (4404 Imp. Gal.)
 INLET/OUTLET: CAST-IN $\phi 102.00$ ($\phi 4.00$ ") PIPE SEAL
 INLET BAFFLE: $\phi 102.00$ ($\phi 4.00$ ") PVC PIPE & SANITARY TEE
 OUTLET BAFFLE/FILTER: POLYLOK PL250 OR EQUIVALENT
 JOINT: MASTIC ROPE SEALANT
 ASSEMBLY: ON-SITE
 MAX. BURIAL DEPTH: 2M[79"]
 DIMENSIONS: INCHES[MM]

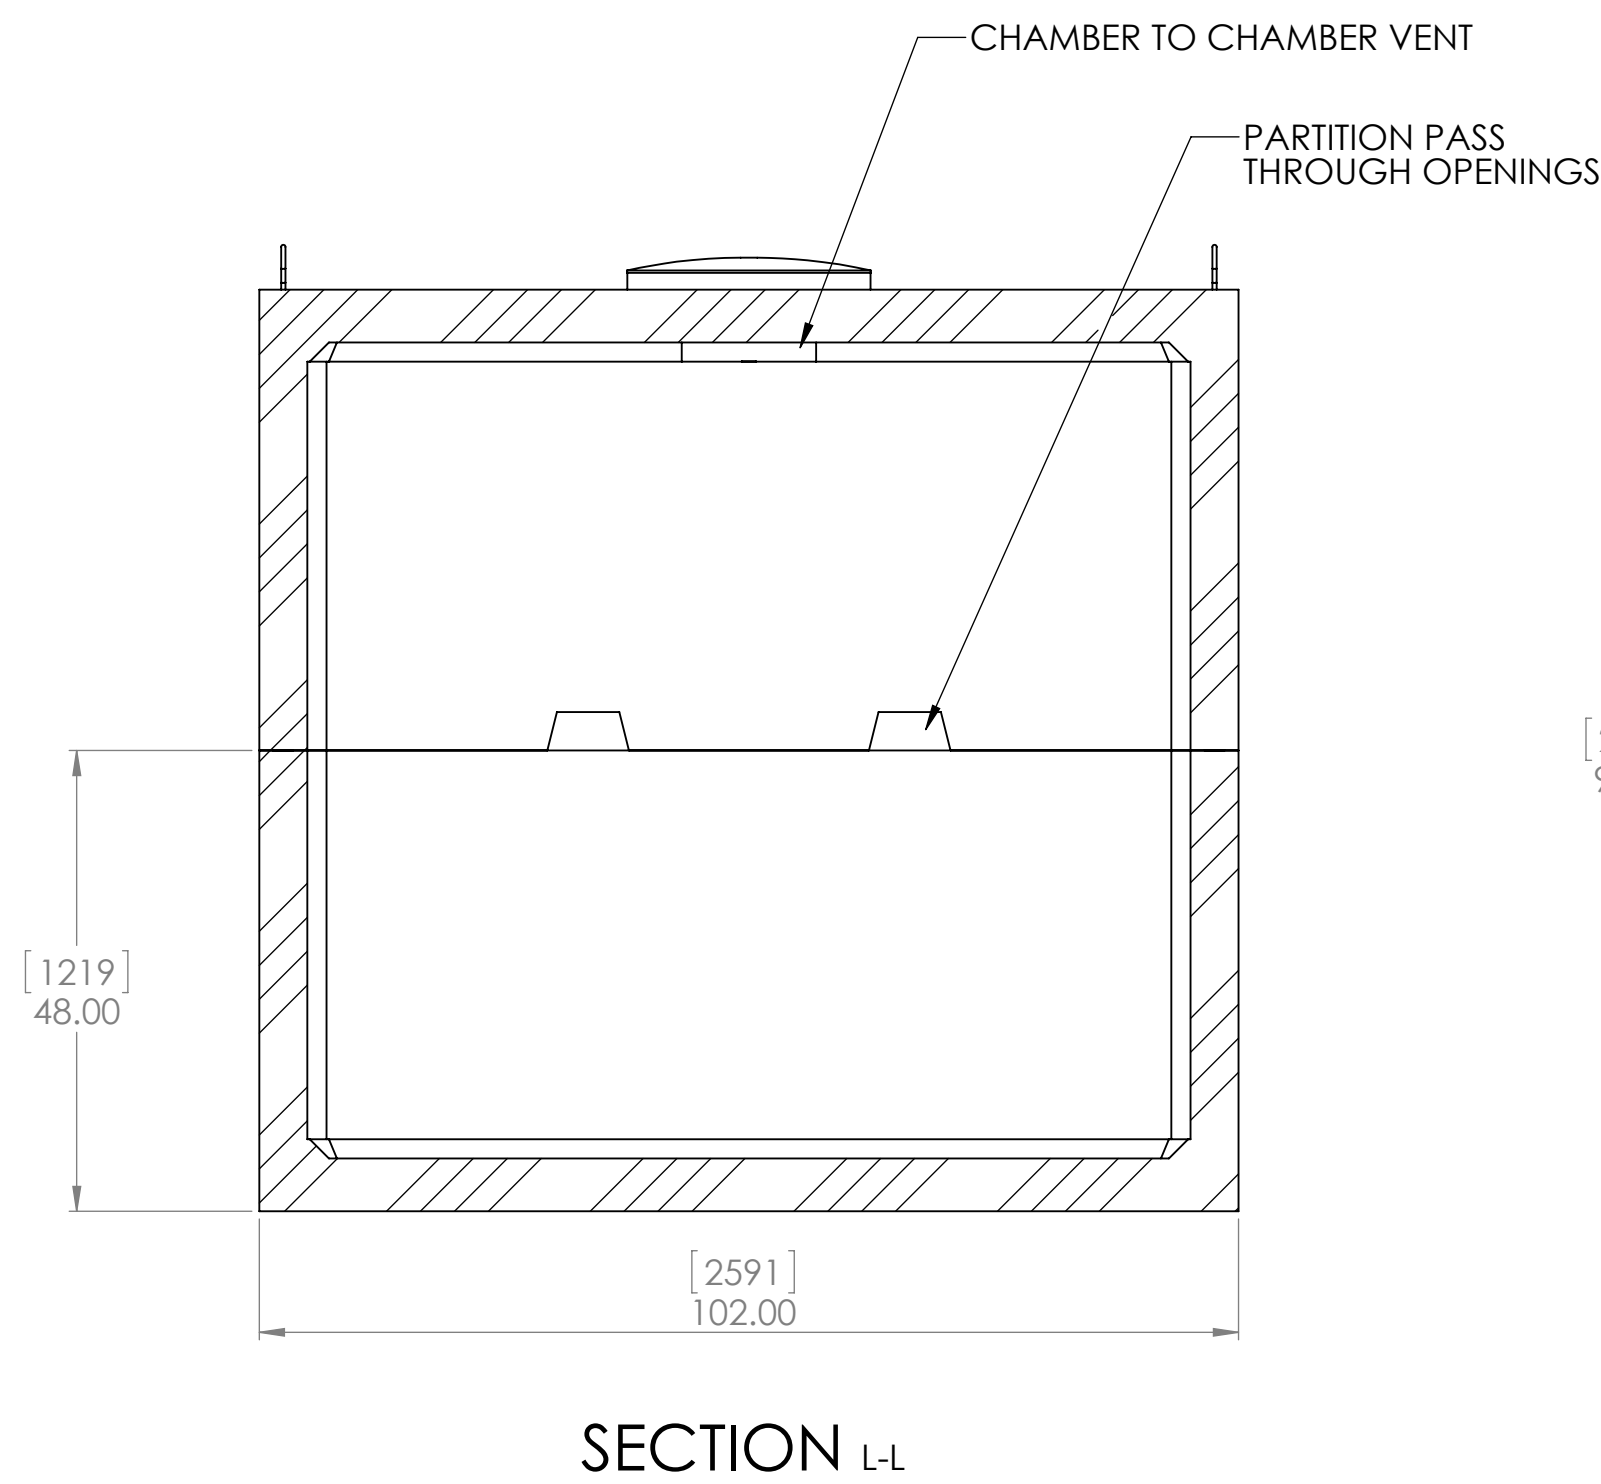

SCALE 1 : 25

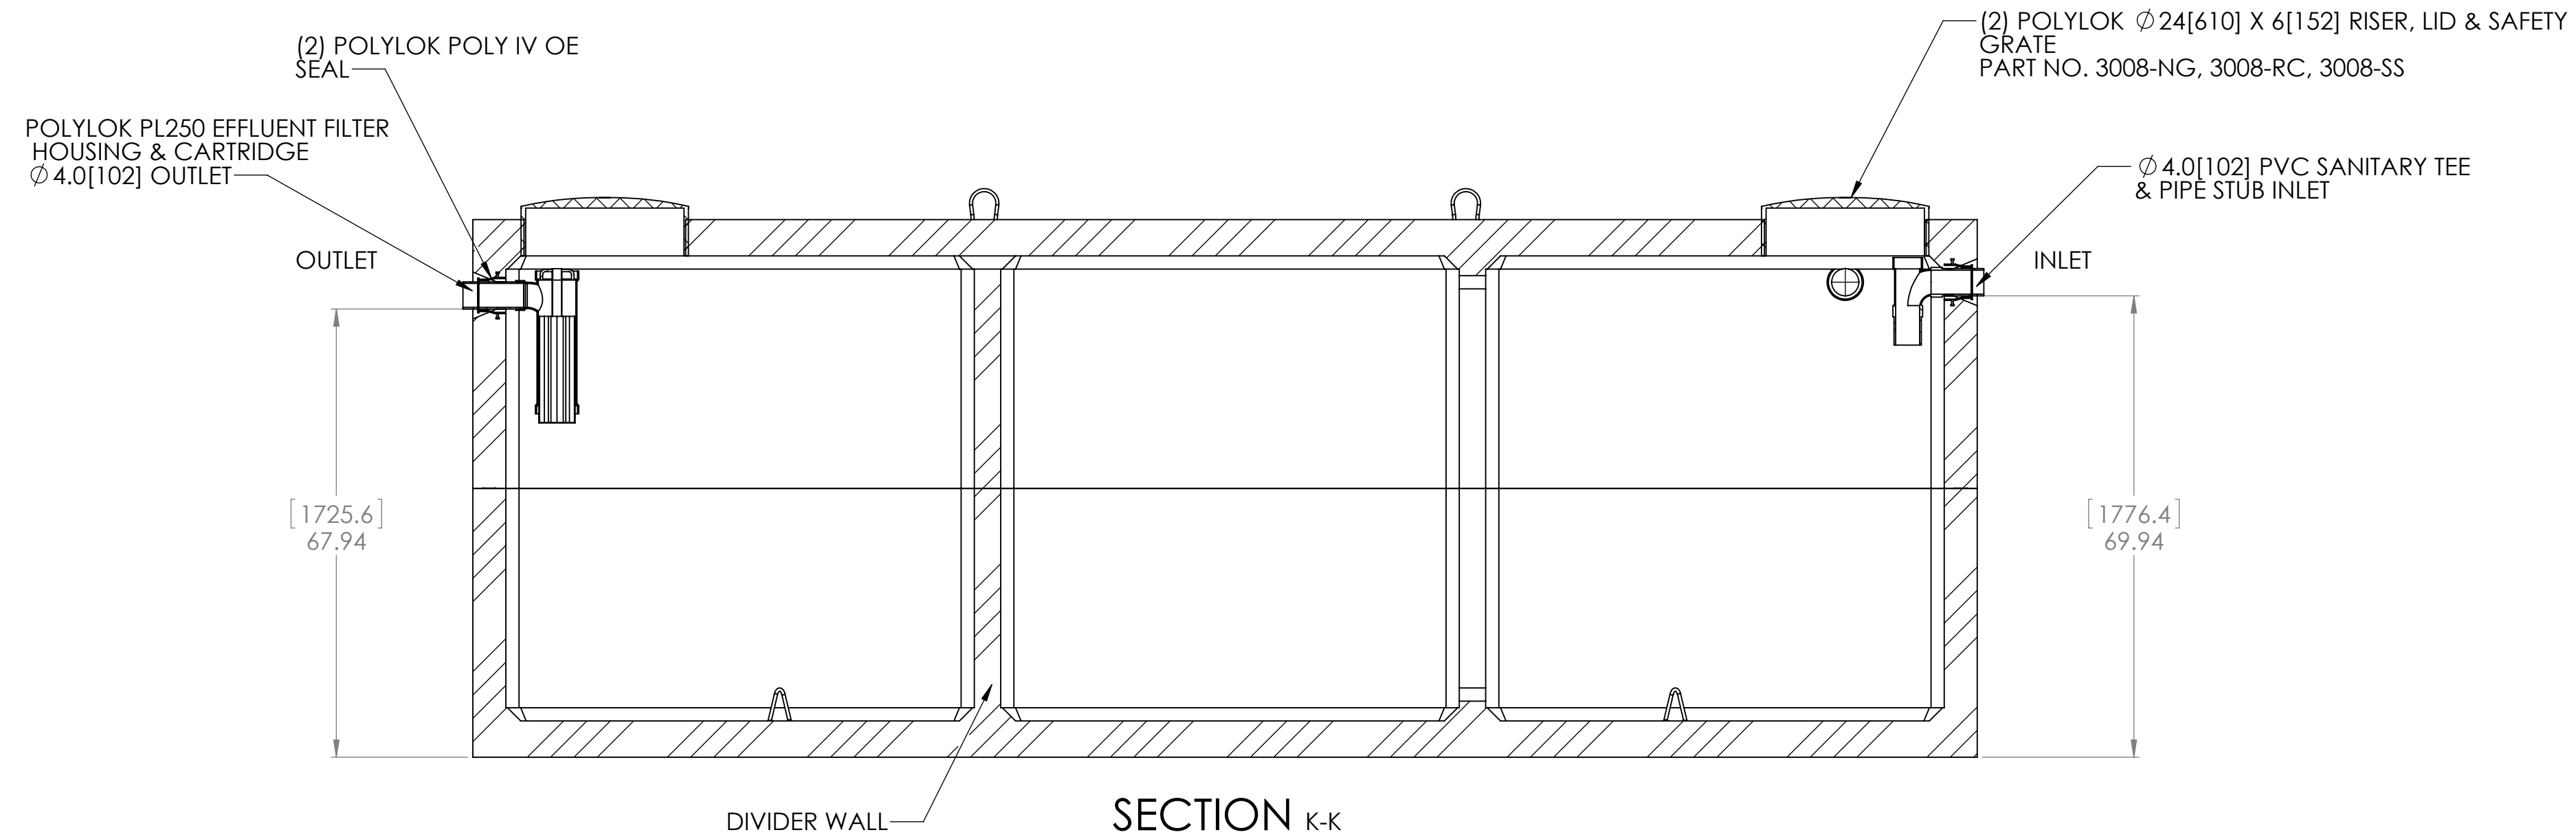

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 REID'S PRECAST CEMENT PRODUCTS LTD.
 REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT THE WRITTEN PERMISSION OF
 REID'S PRECAST CEMENT PRODUCTS LTD.
 IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	REID'S PRECAST CEMENT PRODUCTS LTD LANGTON, ONTARIO, CANADA 519 875-2121
DRAWN				
CHECKED				
ENG APPR.				
MFG APPR.				
INTERPRET GEOMETRIC TOLERANCING PER:		G.A.		SIZE DWG. NO. REV D ST20020L A
NEXT ASSY USED ON FINISH		COMMENTS:		
APPLICATION				SCALE: 1:20 WEIGHT: SHEET 1 OF 1